

A141 High level audible warning system 141dB(A)

The A141 is the latest in a new generation of high output electronic sounders from E2S which are ideal for wide area and disaster warning applications requiring sound coverage up to 750m.

With a choice of 45 standard warning tones including many international signals the A141 is also available in a 'Stage Programmable' version which can offer up to 4 remotely activated stages of alarm. Typical installation include COMAH (Seveso II) Alarm, Toxic Gas Release, Fire, Security, Flood Warning, Tsunami Alert and Civil Defence.

Features

Using four 100W drivers, the A141 produces a powerful sound with an output in excess of 140 dB and is ideal for warning over distances of between 400m and 700m.


The A141 has a lightweight, compact housing designed for easy mounting and is protected to IP65 making it suitable for installation in all locations.


Optional extras include:

- Custom Tones
- Battery Back Up (giving up to 30 minutes of alarm)
- Radio Control

Approvals

- GOST-R certificate: POCC GB.JB05.H00144

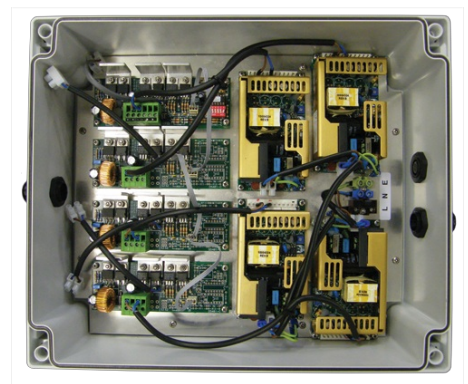

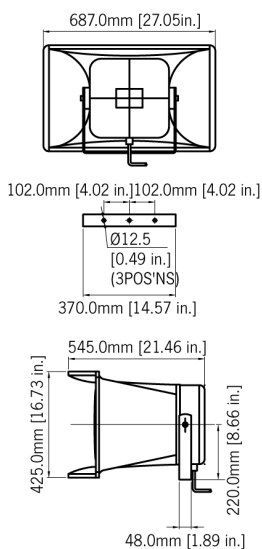

Specification

Horn unit:	
Output:	141dB(A) @ 1m (Tone 2 at nominal voltage +/- 3dB(A)) 112dB(A) @ 30m
Effective distance:	400 to 700m
Dimensions:	(L) 680 X (H) 425 X (D) 550 mm
Operating temp:	-20°C to +55°C [-13° to +131°F]
Weight:	14.0Kg/30.8lbs
Horn Material:	Glass fibre reinforced plastic
Colour:	Grey
Ingress protection:	IP65
Connection:	Supplied with 10m of cable for connection to the control unit as standard. Custom lengths available.
Mounting:	Adjustable U bracket.
Control Panel:	
Input voltage DC:	24V dc (18V dc to 30V dc range)
Input voltage AC:	115 or 230V ac (90V to 264V ac range)
Terminals:	0.5 to 4.0mm ² cable
Operating temp:	-20°C to +55°C [-13° to +131°F]
Ingress protection:	IP65
Weight:	2.9Kg/6.38lbs max. 16.75Kg/36.92lbs max.

Part Codes

Voltage:	Range:	Part code:	Current:
24V dc	18-30V dc	A141DC24G	13.2A
115V ac	90-264V ac	A141AC230G	4.20A
230V ac	90-264V ac	A141AC230G	1.95A

Other voltages available on request.

Tone table

S 1 Description

T 1	340 Hz Continuous
T 2	800/1000Hz @ 0.25 sec Alternating
T 3	500/1200Hz @ 0.3Hz 0.5 sec Slow Whoop
T 4	800/1000Hz @ 1Hz Sweeping
T 5	2400Hz Continuous
T 6	2400/2900Hz @ 7Hz Sweeping
T 7	2400/2900Hz @ 1Hz Sweeping
T 8	500/1200/500Hz @ 0.3Hz Sweeping
T 9	1200/500Hz @ 1Hz - DIN / PFEER P.T.A.P.
T 10	2400/2900Hz @ 2Hz Alternating
T 11	1000Hz @ 1Hz Intermittent
T 12	800/1000Hz @ 0.875Hz Alternating
T 13	2400Hz @ 1Hz Intermittent
T 14	800Hz 0.25sec on, 1 sec off Intermittent
T 15	800Hz Continuous
T 16	660Hz 150mS on, 150mS off Intermittent
T 17	544Hz (100mS)/440Hz (400mS) - NF S 32-001
T 18	660Hz 1.8sec on, 1.8sec off Intermittent
T 19	1.4KHz-1.6KHz 1s, 1.6KHz-1.4KHz 0.5s -NFC48-265
T 20	660Hz Continuous
T 21	554Hz/440Hz @ 1Hz Alternating
T 22	544Hz @ 0.875 sec. Intermittent
T 23	800Hz @ 2Hz Intermittent
T 24	800/1000Hz @ 50Hz Sweeping
T 25	2400/2900Hz @ 50Hz Sweeping
T 26	Bell
T 27	554Hz Continuous
T 28	440Hz Continuous
T 29	800/1000Hz @ 7Hz Sweeping
T 30	300Hz Continuous
T 31	660/1200Hz @ 1Hz Sweeping
T 32	Two T chime.

S 1 Description

T 33	745Hz @ 1Hz Intermittent
T 34	1000 & 2000Hz @ 0.5 sec Alternating - Singapore
T 35	420Hz @ 0.625 sec Australian Alert
T 36	500-1200Hz 3.75sec /0.25sec. Australian Evac.
T 37	1000Hz Continuous - PFEER Toxic Gas
T 38	2000Hz Continuous
T 39	800Hz 0.25sec on, 1 sec off Intermittent
T 40	544Hz (100mS)/440Hz (400mS) - NF S 32-001
T 41	Motor Siren - slow rise to 1200 Hz
T 42	Motor Siren - slow rise to 800 Hz
T 43	1200 Hz Continuous
T 44	Motor Siren - slow rise to 2400 Hz
T 45	1KHz 1s on, 1s off Intermittent - PFEER Gen. ...