




Ex accessories

V-Ex

Metr.

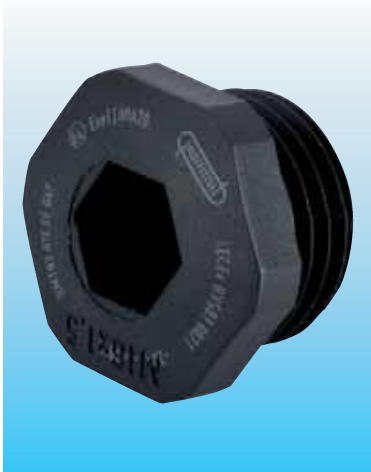

Material Polyamide



O-Ring Buna-N




Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)

Operating Temperature -20 °C – 90 °C (-4 °F – 194 °F)

Colours black (RAL 9005)

II 2G 1D

For the international certificates please see page 170 or our homepage www.hummel.com



AG	GL mm	H mm	D mm	⌀ mm	⌒ mm	Number
M 12 x 1,5	8,5	13	16,5	15	6	1.297.1201.50
M 16 x 1,5	8,5	13	20,5	19	8	1.297.1601.50
M 20 x 1,5	9	14,5	25,5	24	8	1.297.2001.50
M 25 x 1,5	10,5	16	30,5	28	8	1.297.2501.50
M 32 x 1,5	11,5	17,5	38	36	8	1.297.3201.50
M 40 x 1,5	11,5	18	48	46	8	1.297.4001.50
M 50 x 1,5	13,5	20	60	55	8	1.297.5001.50
M 63 x 1,5	14,5	21	75	70	8	1.297.6301.50

V-Ex

PG



Material Polyamide




O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)


Operating Temperature -20 °C – 90 °C (-4 °F – 194 °F)

Colours black (RAL 9005)

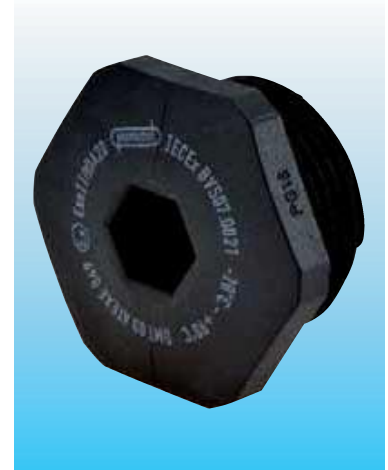

II 2G 1D

For the international certificates
please see page 170 or our homepage
www.hummel.com



AG	GL mm	H mm	D mm	mm	mm	Number
PG 7	8,5	13	16,5	15	6	1.297.0701.11
PG 9	8,5	13	20,5	19	8	1.297.0901.11
PG 11	9	14,5	25,5	24	8	1.297.1101.11
PG 13,5	9	14,5	25,5	24	8	1.297.1301.11
PG 16	10,5	16	30,5	28	8	1.297.1601.11
PG 21	11,5	17,5	38	36	8	1.297.2101.11
PG 29	11,5	18	48	46	8	1.297.2901.11
PG 36	13,5	20	60	55	8	1.297.3601.11
PG 42	13,5	20	65	60	8	1.297.4201.11
PG 48	14,5	21	75	70	8	1.297.4801.11